


Rotary Filter KF-Series

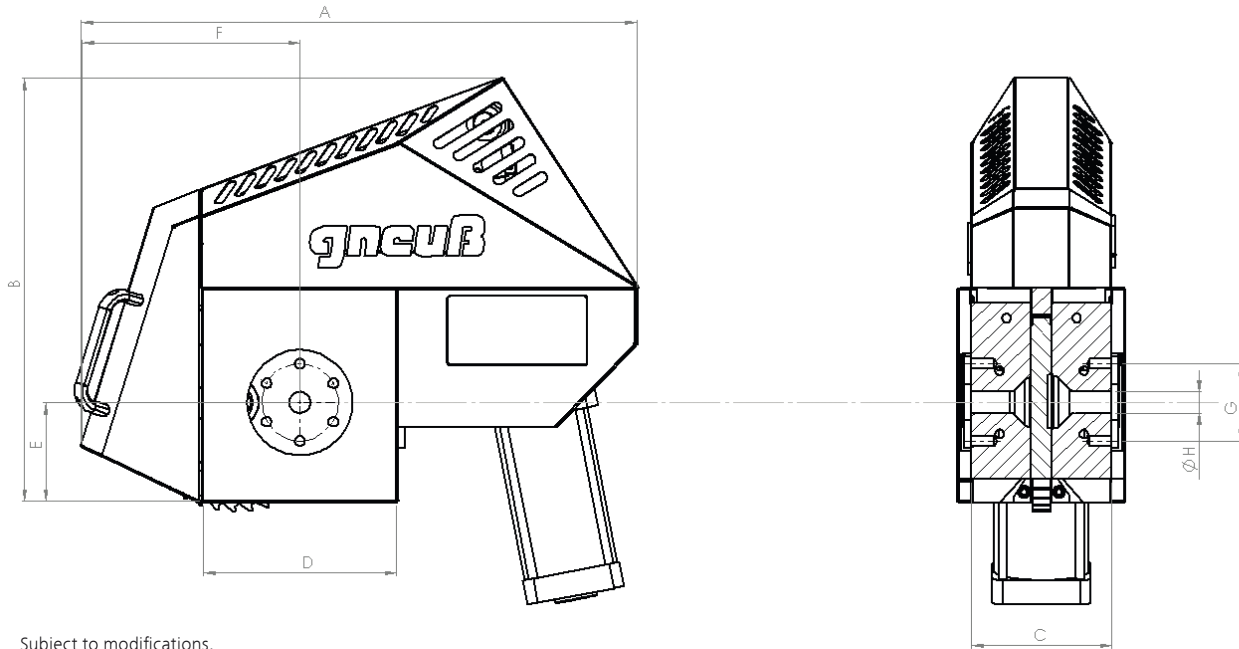

Subject to modifications.

Technical Data KF

filter type	screen area	heating capacity in watt	heater zones	pressure in psi max. ⁽¹⁾	temp. in °F max. ⁽²⁾	Q in lbs/h ⁽³⁾	dimensions in inches								weight in lbs
							A	B	C	D	E	F	G	H ⁽⁴⁾	
	active in in ²	electric	electric				A	B	C	D	E	F	G	H ⁽⁴⁾	
KF 45	2.5	3,900	2	7,500	600	220	25.4	18.1	5.1	7.3	3.7	9.4	3.5	0.8	200
KF 60	4.3	4,500	2	7,500	600	440	32.5	20.7	5.7	9.4	4.7	10.4	4.3	0.8	250
KF 75	6.8	5,100	2	7,500	600	660	35.0	24.8	7.9	11.0	5.6	12.5	4.3	1.0	450
KF 90	10	10,700	2	7,500	600	1,100	40.2	27.2	9.1	12.2	6.5	14.2	4.7	1.2	700
KF 110	15	12,700	2	7,500	600	1,600	42.5	30.3	10.0	15.0	7.9	16.1	5.5	1.2	800
KF 130	21	14,700	2	7,500	600	2,000	46.1	32.7	11.7	16.5	9.0	18.1	6.3	1.4	1,100
KF 150	28	15,700	3	7,500	600	3,000	48.8	37.8	13.0	17.9	11.2	20.9	6.3	1.4	1,600
KF 175	37	18,000	3	7,500	600	4,400	55.9	44.1	15.2	20.7	13.1	24.1	8.7	1.6	2,400
KF 200	49	21,000	3	7,500	600		59.6	53.9	22.0	28.0	15.9	36.0	11.2	1.6	5,100

(1) = High pressure versions available as an option.

(2) = Up to 750 °F possible as an option.

(3) = Based on: MFI 2-5, filtration fineness 200 microns and differential pressure 725 psi.

(4) = The dimension „H“ can be freely chosen, the values given are maximum values.