


Rotary Filter CSFprimus-Serie

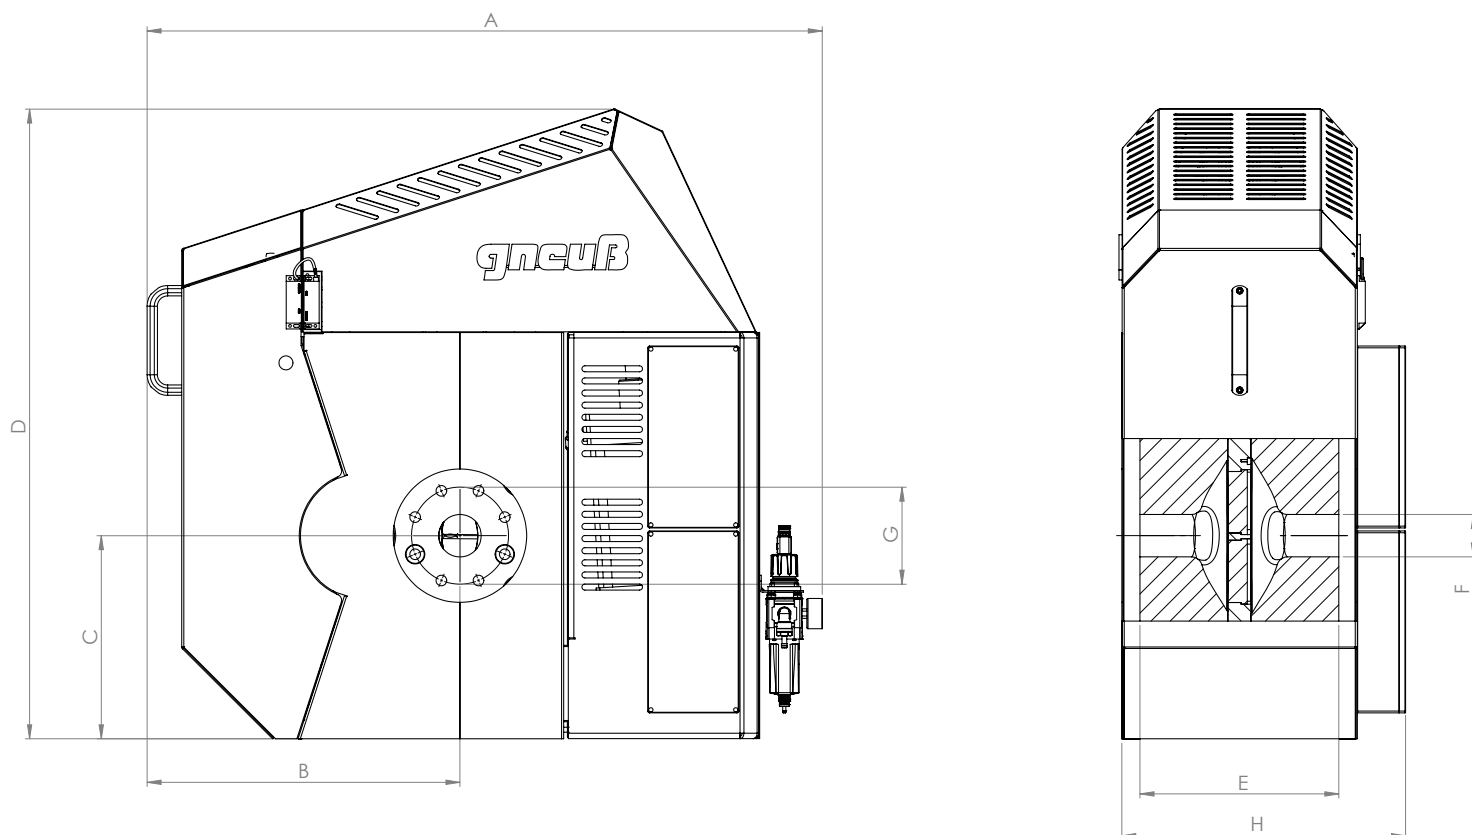

Technische Daten CSFprimus

Filtertyp	Filterfläche in cm ²		Heizleistung in Watt		Heiz-zonen ⁽¹⁾ Elektr.	Max. Druck in bar ⁽²⁾	Max. Temp. in °C ⁽³⁾	Q in kg/h	Abmessungen in mm								Ge-wicht in kg
	Aktive	Elektr.	Flüssig	Elektr.					A	B	C	D	E	F	G	H	
CSFprimus 30	40	4.000	5.000	2	350	320	200	908	377	225	642	196	15	110	276	230	
CSFprimus 45	90	5.600	7.000	2	350	320	410	908	377	225	642	196	20	110	276	230	
CSFprimus 60	160	5.600	7.000	2	350	320	750	908	377	225	642	196	25	110	276	230	
CSFprimus 75	215	5.900	8.000	2	350	320	1.000	948	407	250	802	242	25	140	322	320	
CSFprimus 90	355	14.000	18.000	2	300	320	1.700	1.109	517	335	974	328	25	160	408	680	
CSFprimus 110	419	14.000	18.000	2	300	320	1.970	1.109	517	335	974	328	25	160	408	680	
CSFprimus 150	590	10.680	20.000	2	300	320	2.800	1.028	547	370	1.161	372	35	160	552	966	
CSFprimus 175	890	20.300	26.000	3	250	320	4.200	1.558	677	480	1.272	419	40	220	499	1.500	
CSFprimus 200	1.180	28.500	37.000	3	200	320	5.600	1.713	772	555	1.402	566	45	250	646	2.900	
CSFprimus 250	1.600	33.300	43.000	3	200	320	7.700	1.773	837	585	1.502	622	50	250	702	3.600	
CSFprimus 330	2.600	-	54.000	3	200	320	12.200	2.278	992	785	1.902	744	50	300	784	6.200	
CSFprimus 400	3.560	-	65.000	3	180	320	16.700	2.563	1.177	855	2.102	812	50	350	892	9.800	

1 – 1 Heizzone bei Flüssigbeheizung | 2 – Kann optional erhöht werden | 3 – In Option 400 °C möglich
Auch in ATEX-Ausführung möglich.