


# MRSpure Extruder

## Technical Data

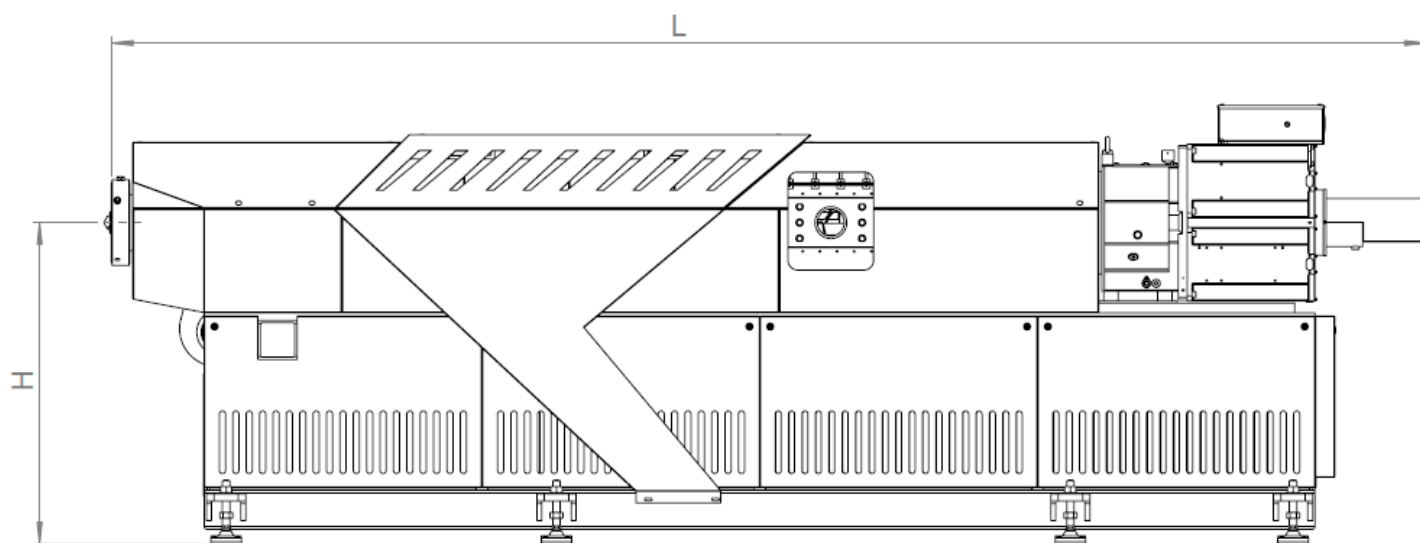

Subject to modifications.

	MRSpure 35	MRSpure 50	MRSpure 70	MRSpure 90	MRSpure 110	MRSpure 130	MRSpure 160	MRSpure 200
Screw diameter Ø mm	35	50	70	90	110	130	160	2 x 130
Drive rating kW	25	55	107	170	235	355	540	2 x 355
max. screw speed (rpm)	220	210	165	150	120	115	90	115
Extrusion height H mm	700	1.000	1.150	1.150	1.300	1.300	1.450	1.300
Length L mm	2.250	3.100	4.830	5.700	6.650	7.785	10.510	8.275
Width B mm	480	850	1.200	1.490	1.520	1.560	1.685	2.670
Weight approx. kg	700	1.550	3.250	5.450	7.130	7.700	15.350	16.750
<b>Throughput rate in kg/h</b>								
PET	35	80	200	450	700	1.000	1.400	2.000
PP + PE	25	60	130	300	450	750	1.000	1.600
PA	28	70	160	360	560	880	1.200	1.900
PS	30	60	150	350	450	750	1.100	1.500

\* As each extruder is engineered to a specific project, the technical data may deviate from the values listed in this table. Detailed information on the relevant technical data is provided to you with your quotation.