


MRSpure Extruder

Technical Data

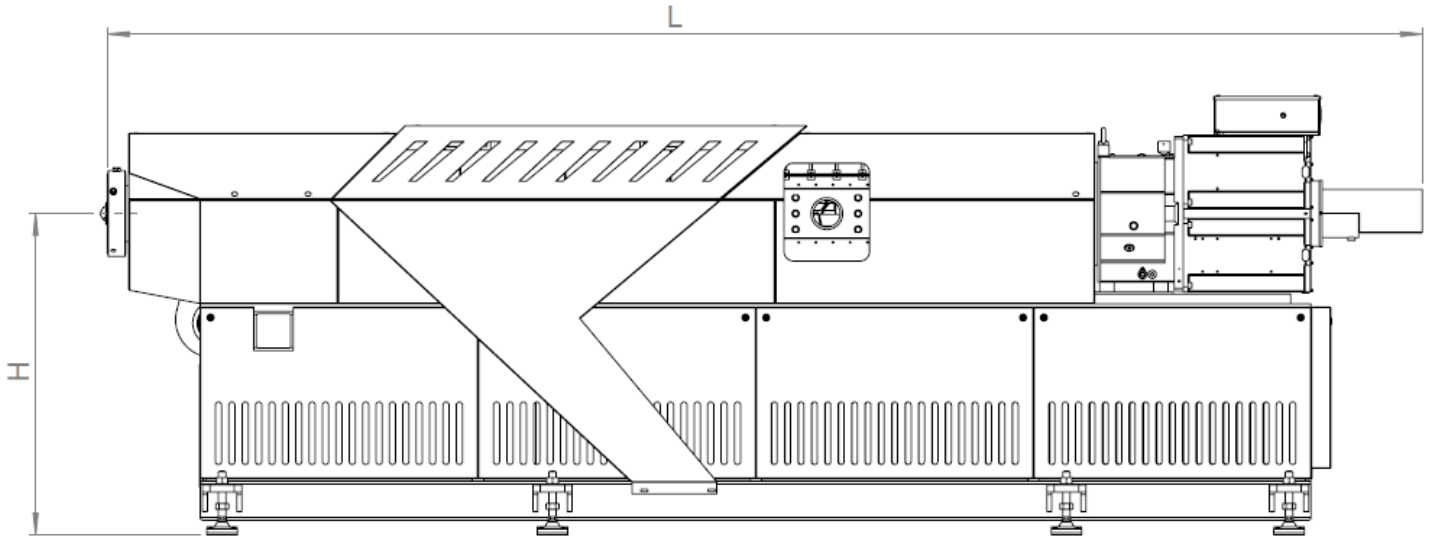

Subject to modifications.

	MRSpure 35	MRSpure 50	MRSpure 70	MRSpure 90	MRSpure 110	MRSpure 130	MRSpure 160	MRSpure 200
Screw diameter Ø mm	35	50	70	90	110	130	160	2 x 130
Drive rating kW	25	55	107	170	235	355	540	2 x 355
max. screw speed (rpm)	220	210	165	150	120	115	90	115
Extrusion height H in	28	40	45	45	51	51	57	57
Length L in	90	121	161	181	200	220	268	248
Width B in	20	35	47	59	60	62	66	105
Weight approx. lbs	1.540	3.420	7.165	12.015	15.720	17.000	33.840	37.000
Throughput rate in kg/h								
PET	35	80	200	450	700	1.000	1.400	2.000
PP + PE	25	60	130	300	450	750	1.000	1.600
PA	28	70	160	360	560	880	1.200	1.900
PS	30	60	150	350	450	750	1.100	1.500

* As each extruder is engineered to a specific project, the technical data may deviate from the values listed in this table. Detailed information on the relevant technical data is provided to you with your quotation.