


Rotary Filter SFneos Serie

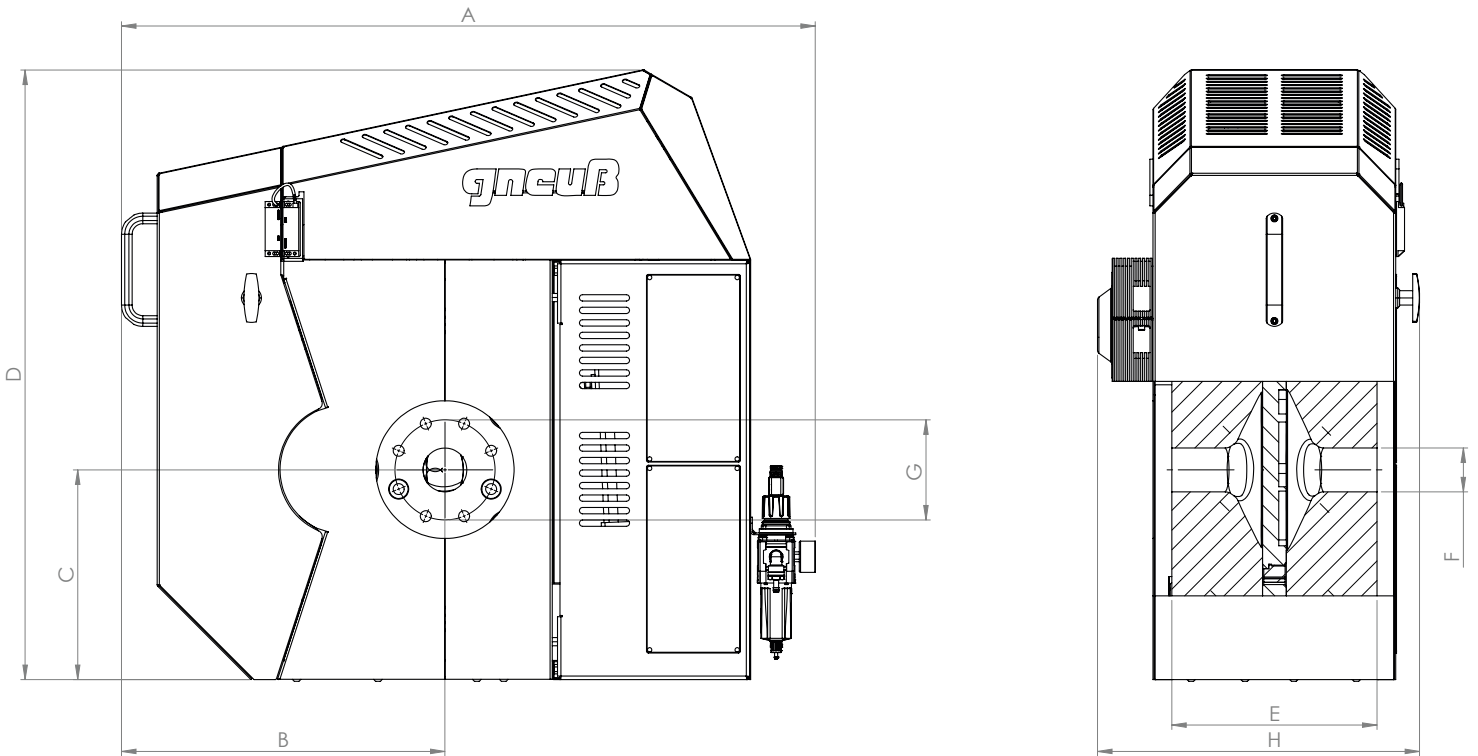

Technical Data SFneos

filter type	screen area in in ²		heating capacity in watt		heater zones ⁽¹⁾	pressure in psi max. ⁽²⁾	temp. in °F max. ⁽³⁾	Q in lbs/h	dimensions in inches								weight in lbs
	active	electric	liquid	electric					A	B	C	D	E	F	G	H	
SFneos 30	3	4,000	5,000	2	5,000	600	440	35.7	14.8	8.9	25.3	7.7	0.6	4.3	15.1	500	
SFneos 45	11	5,600	7,000	2	5,000	600	770	35.7	14.8	8.9	25.3	7.7	0.8	4.3	15.1	500	
SFneos 60	17	5,600	7,000	2	5,000	600	1,100	34.9	13.3	9.6	28.5	7.7	1.0	4.3	17.0	500	
SFneos 75	21	6,100	8,000	2	5,000	600	1,400	39.3	19.3	10.2	29.9	9.1	1.0	5.1	16.9	700	
SFneos 90	40	14,000	18,000	2	4,350	600	2,650	43.7	20.4	13.2	38.3	12.9	1.0	6.3	20.3	1,500	
SFneos 110	47	14,000	18,000	2	4,350	600	3,150	43.7	20.4	13.2	38.3	12.9	1.0	6.3	20.3	1,500	
SFneos 150	70	15,400	20,000	2	4,350	600	4,600	45.6	21.5	14.6	41.5	14.6	1.4	6.3	21.2	2,000	
SFneos 175	95	20,300	26,000	3	3,500	600	6,400	51.9	26.1	18.4	50.7	16.5	1.6	8.7	24.3	3,300	
SFneos 200	132	28,500	37,000	3	2,900	600	8,800	67.4	30.4	21.9	55.2	22.3	1.8	9.8	33.6	6,400	
SFneos 250	198	33,300	43,000	3	2,900	600	13,200	69.8	33.0	23.0	59.1	24.5	2.0	9.8	35.8	8,000	
SFneos 330	279	-	54,000	-	2,900	600	18,700	89.7	39.1	30.9	74.9	29.3	2.0	11.8	41.0	13,700	
SFneos 400	367	-	65,000	-	2,600	600	24,500	100.9	46.3	33.7	82.8	32.0	2.0	13.8	45.3	21,600	

1 – 1 heater zone for liquid heating | 2 – high pressure versions available as an option | 3 – up to 400 °C possible as an option.
Also available in ATEX design.