


MRSpure Extruder

Technical Data

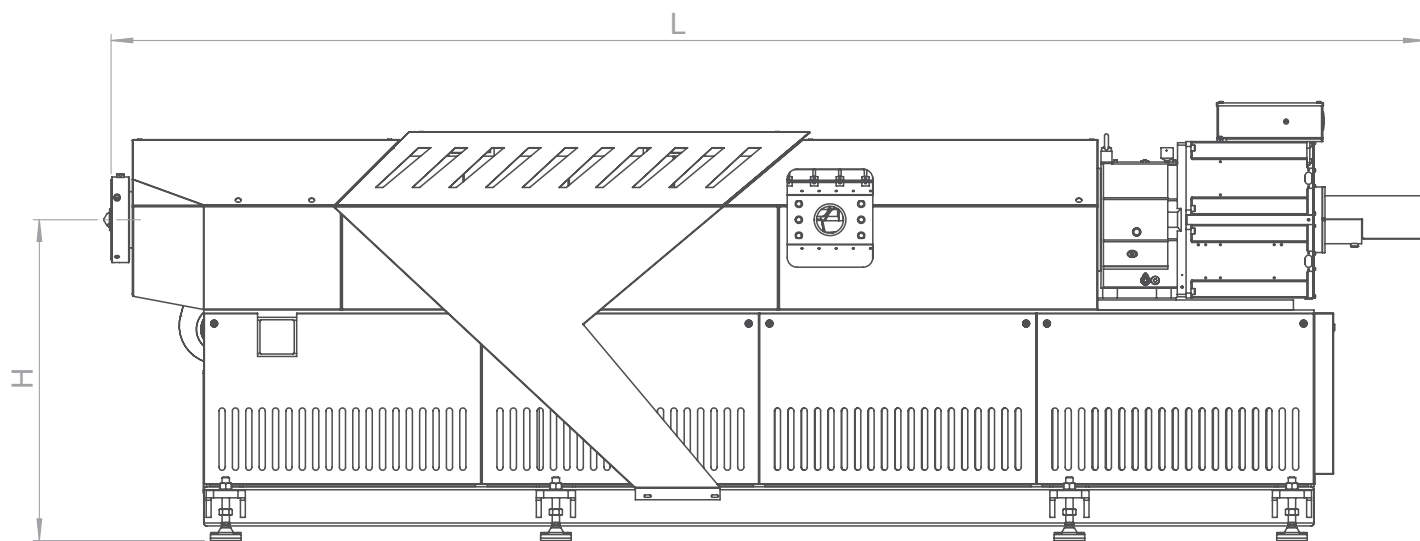

Subject to modifications.

	MRSpure 35	MRSpure 50	MRSpure 70	MRSpure 90	MRSpure 110	MRSpure 130	MRSpure 160	MRSpure 200
Screw diameter Ø mm	35	50	70	90	110	130	160	200
Drive rating kW	25	55	107	170	235	355	540	860
max. screw speed (rpm)	220	210	165	150	120	115	90	75
Extrusion height H in	30	40	45	45	50	50	57	57
Length L in	90	122	190-240	225-270	260-315	310-370	415-480	515
Width B in	20	33	47	58	60	61	66	68
Weight approx. lbs	1,500	3,400	7,200- 10,000	12,000- 17,000	15,700- 22,000	17,000- 24,000	33,800- 47,400	56,200
Throughput rate in kg/h								
PET	35	80	200	450	700	1,000	1,400	2,000
PP + PE	25	60	130	300	450	750	1,000	1,600
PA	28	70	160	360	560	880	1,200	1,900
PS	30	60	150	350	450	750	1,100	1,500

* As each line is engineered to a specific project, the technical data may deviate from the values listed in this table. Detailed information on the relevant technical data is provided to you with your quotation.