


MRSpure Extruder

Technical Data

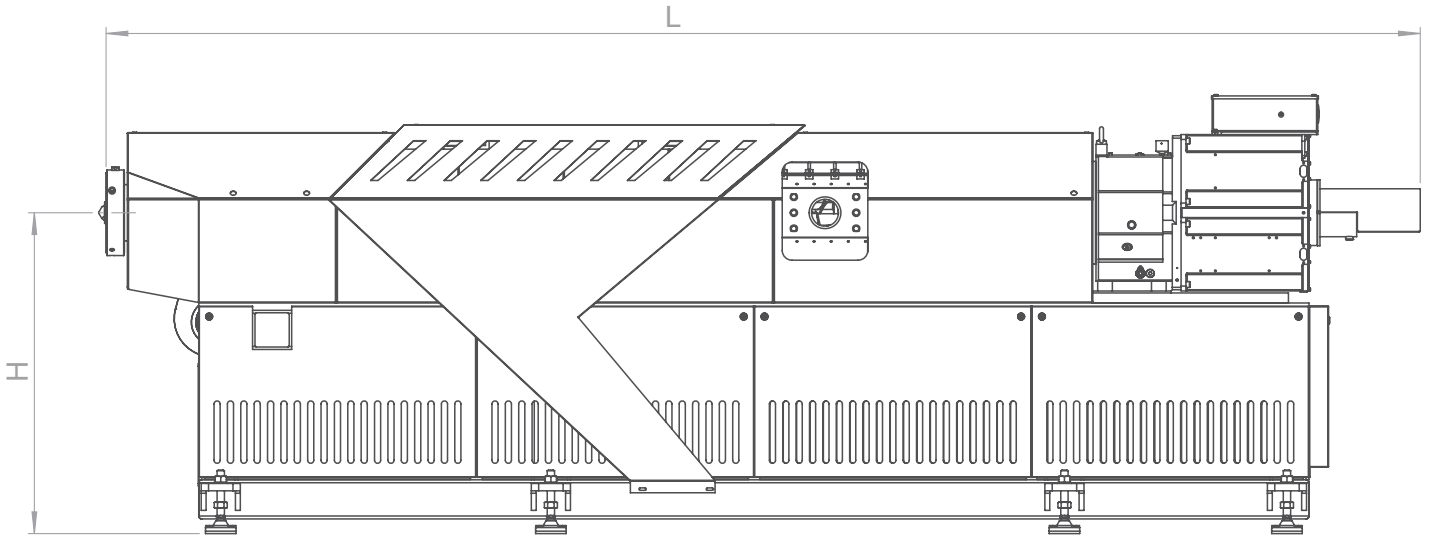

Subject to modifications.

	MRSpure 35	MRSpure 50	MRSpure 70	MRSpure 90	MRSpure 110	MRSpure 130	MRSpure 160	MRSpure 200
Screw diameter Ø mm	35	50	70	90	110	130	160	200
Drive rating kW	25	55	65	65	80	170	190	275
max. screw speed (rpm)	220	210	165	135	120	110	90	75
Extrusion height H in	28	40	45	45	50	50	60	60
Length L in	90	120	160	180	200	220	270	250
Width B in	20	35	50	60	60	62	66	105
Weight approx. lbs	1,500	3,400	7,700	12,125	16,500	17,600	33,000	44,000
Throughput rate in kg/h								
PET	35	80	200	450	700	1,000	1,400	2,000
PP + PE	25	60	130	300	450	750	1,000	1,600
PA	28	70	160	360	560	880	1,200	1,900
PS	30	60	150	350	450	750	1,100	1,500

* As each line is engineered to a specific project, the technical data may deviate from the values listed in this table. Detailed information on the relevant technical data is provided to you with your quotation.